




- 1 New Hampshire
- 2 Vermont
- 3 Massachusetts
- 4 Rhode Island
- 5 Connecticut
- 6 New Jersey
- 7 Delaware
- 8 Maryland
- 9 West Virginia

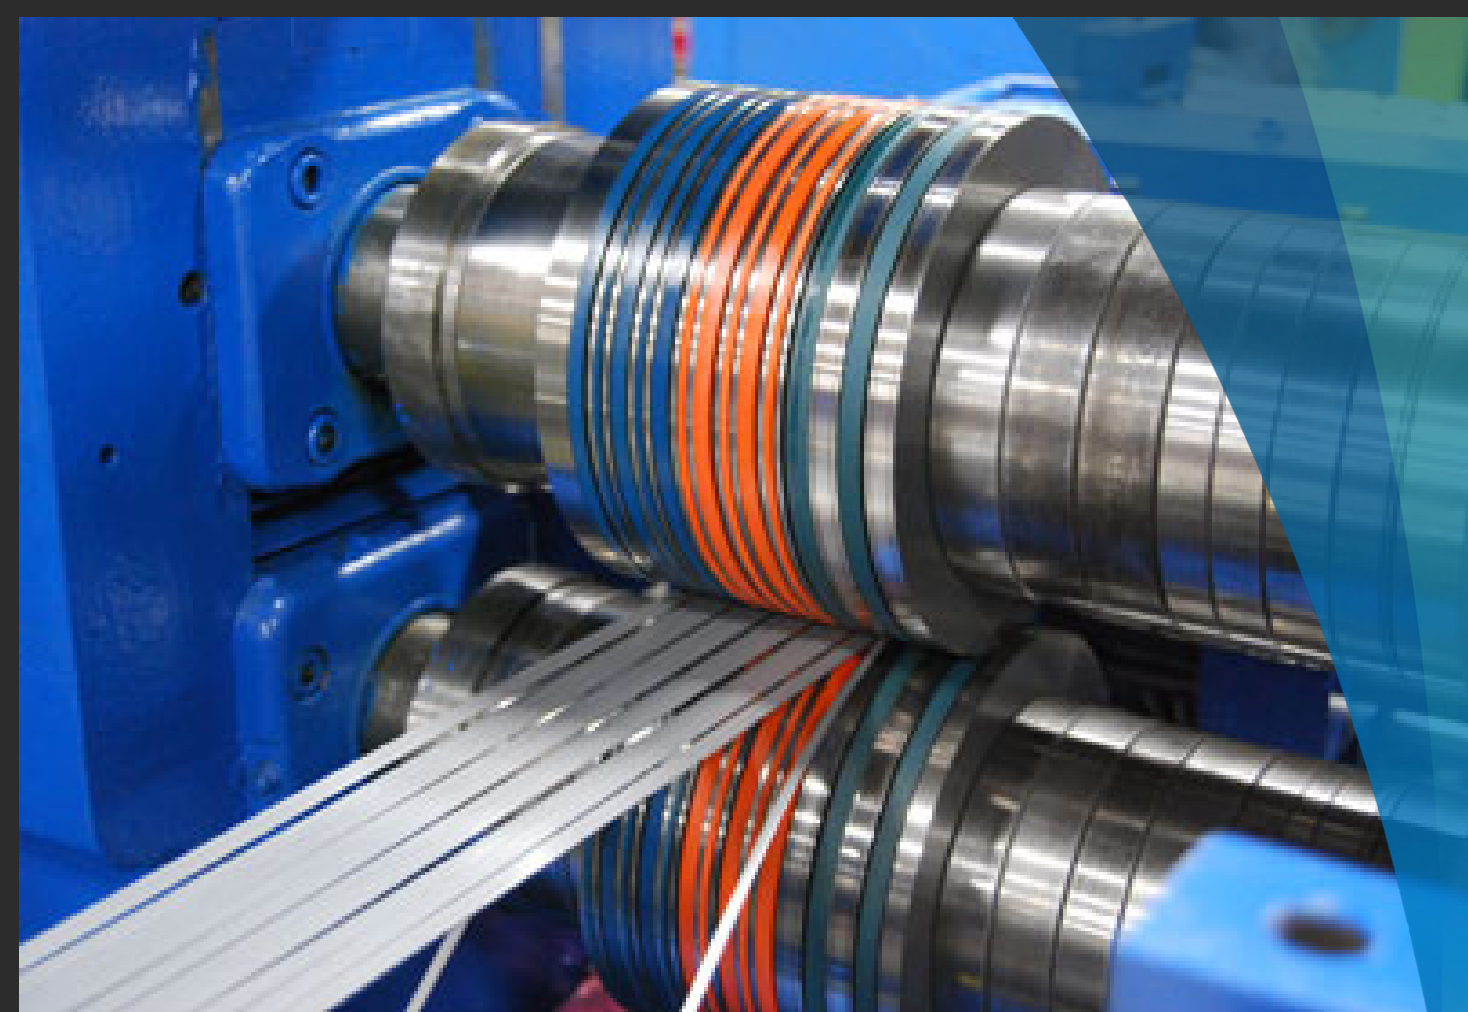

Veronica Cardenas
 veronica@nks.com
 224-220-2609 Office
 224-220-2639 Fax
 847-970-2881 Cell



Ernesto Alvarado
 ernesto@nks.com
 +52 (1) 442-285-0724
 Office



Jose Luis Urista
 jlurista@nks.com
 +52 (1) 811-765-9772
 Cell



Brian Spicer
 bspicer@nks.com
 615-793-4700 Office
 615-793-4701 Fax
 615-500-4721 Cell




John Burke
 Johnb@nks.com
 224-220-2612 Office
 224-220-2642 Fax
 708-426-6093 Cell




Yolanda Allen-Moka
 yolanda@nks.com
 773-540-6122 Cell
 224-220-2647 Fax




Steve Tandy
 standy@nks.com
 248-266-6917 Office
 248-765-3670 Cell



Chris Candela
 chris@nks.com
 248-266-6917 Office
 248-260-8638 Cell



Greg Sayre
 greg@nks.com
 224-484-8858 Office
 847-772-5744 Cell



Denny Myers
 dmyers@nks.com
 440-282-1027 Office
 224-220-2631 Fax
 440-670-7275 Cell



**NATIONAL
 KWIKMETAL
 SERVICE**

National Kwikmetal Service is one of the fastest growing metal service center in the USA. Our expertise and inventory are focused on high valued materials including stainless steel, aluminum and electrical steel. Established in 1989, NKS started as a small order specialist, handling orders under 200 pounds. Today, with 8 slitters and cut to length capabilities in 4 strategic locations, NKS can process orders both large and small. We have achieved this growth by offering quality products at a competitive price, as well as providing value added services to meet our customers' most demanding needs. At NKS "Our Business is Stainless, Our Product is Service."

Products

Annealed and Tempered/ No Minimum Quantities Stainless Steel Slitting

301/304L	316	305	409	430	439	441	18SR
0.003	0.004	0.003	0.010	0.010	0.010	0.018	0.018
0.004	0.006	0.004	0.012	0.012	0.012	0.020	0.020
0.006	0.008	0.006	0.015	0.015	0.015	0.024	0.024
0.008	0.009	0.008	0.018	0.018	0.018	0.030	0.030
0.009	0.010	0.009	0.020	0.020	0.020	0.035	0.035
0.010	0.012	0.010	0.024	0.024	0.024	0.042	0.042
0.012	0.015	0.012	0.030	0.030	0.030	0.048	0.048
0.015	0.018	0.015	0.035	0.035	0.035	0.050	0.050
0.018	0.020	0.018	0.042	0.042	0.042	0.060	0.060
0.020	0.024	0.020	0.048	0.048	0.048	0.075	0.075
0.024	0.030	0.024	0.050	0.050	0.050	0.090	0.090
0.030	0.035	0.030	0.060	0.060	0.060	0.105	0.105
0.035	0.042	0.035	0.075	0.075	0.075	0.120	0.120
0.042	0.048	0.042	0.090	0.090	0.090	0.125	0.125
0.048	0.050	0.048	0.105	0.105			
0.050	0.060	0.050	0.120	0.120			
0.060	0.075	0.060	0.125				
0.075	0.090	0.075	0.135				
0.090	0.105	0.090					
0.105	0.120	0.105					
0.120	0.125	0.120					
0.125	0.135	0.125					
0.135							

Also available in 1/4 Hard, 1/2 Hard, 3/4 Hard and Full Hard Slitting capabilities: .156" up to 48" wide
6'; 12'; 12" pr 20" ID up to 70" OD

Operating Facilities

Illinois (Des Plaines/Itasca)

Slitter	12" Yoder	18" Reusch	24" Reusch	24" Braner	52" Braner
Max. Coil Weight Un-coiler	5,000 lb	5,000 lb	10,000 lb	10,000 lb	30,000 lb
Max. Coil Weight Re-coiler	5,000 lb	4,000 lb	10,000 lb	8,000 lb	30,000 lb
Max. Coil Width Entry	12.500"	18.500"	24.500"	24.000"	52.000"
Max. Coil Width Exit	12.000"	18.000"	24.000"	24.000"	52.000"
Max. Coil OD Un-Coiler	60.000"	60.000"	60.000"	72.000"	72.000"
Max. Coil OD Re-Coiler	50.000"	48.000"	48.000"	72.000"	70.000"
Coil ID Range Entry	16-20-24"	16-20-24"	16-20-24"	16-20-24"	20-24"
Coil ID Range Exit	6-12-16-20"	6-12-16-20"	6-12-16-20"	16-20-24"	20-24"
Max. Gauge Thickness	0.030"	0.135"	0.030"	0.0750"	0.120"
Min. Gauge Thickness	0.001"	0.004"	0.001"	0.007"	0.10"
PVC Applicator	Yes	Yes	Yes	Yes	Yes

Tennessee (La Vergne)

Slitter	26" Stamco	52" Stamco	Edger
Max. Coil Weight Un-coiler	10,000 lb	40,000 lb	4,000 lb
Max. Coil Weight Re-coiler	10,000 lb	30,000 lb	4,000 lb
Max. Coil Width Entry	26.500"	52.500"	6.500"
Max. Coil Width Exit	25.000"	50.000"	6.500"
Max. Coil OD Un-Coiler	61.500"	67.000"	60.000"
Max. Coil OD Re-Coiler	60.000"	60.000"	60.000"
Coil ID Range Entry	20-24"	16-20-24"	16-20"
Coil ID Range Exit	16-20"	20-24"	20 Only
Max. Gauge Thickness	0.095"	0.135"	0.130"
Min. Gauge Thickness	0.015"	0.016"	0.027"
PVC Application	Yes	Yes	No

Mexico (Queretaro)

Slitter	24" Yoder
Max. Coil Weight Un-coiler	12,000 lb
Max. Coil Weight Re-coiler	12,000 lb
Max. Coil Width Entry	24.000"
Max. Coil Width Exit	24.000"
Max. Coil OD Un-Coiler	51.000"
Max. Coil OD Re-Coiler	51.000"
Coil ID Range Entry	16-20"
Coil ID Range Exit	16-20"
Max. Gauge Thickness	0.075"
Min. Gauge Thickness	0.010"
PVC Application	Yes

Call NKS toll free 800-722-5029
or visit us on line at www.nks.com

